

GRAVITY

VERTICAL



BUCKET A

DESCRIPTION

VERTICAL decorative binder superior UV resistance and durability
For resin quartz , marble , granite , natural stone carpet

APPLICATION PROCEDURE

Remove oil, grease, and wax contaminants. If used for concrete sealing, cement laitance, loose particles, mould release agents, and cured membranes must also be removed. Ceramic tiles must be cleaned with an appropriate descaling product and mechanically abraded where required.

BEFORE STARTING THE APPLICATION, THE SURFACE MUST BE DRY.

The material must not come into contact with water until it is fully dry.

Your tools must always be clean during the application.

Important: APPLY USING A BRUSH ONLY

Divide the surface into approximately 1 square meter sections. Apply Bucket A material with a brush and immediately use the mixed Vertical Bucket B (Vertical Resin & Quartz). Then continue with the next square meter.

When finished, leave to dry for 24 hours. Then use Gravity Resin Quartz Floor Bucket A+B (mixed) as a top coat with a paint roller (make sure the material is evenly distributed over the roller. Before applying to the surface, roll a few times to remove excess material so that it leaves a thin coat).

After applying the top coat, curing takes another 24 hours.

PRIMING:

Priming is required when the application is on non-porous substrates such as ceramic/glazed tiles and also on cement floors. In this case, 2-Component Cement Insulation is applied using a roller (waiting time: 2-3 days before applying VERTICAL RESIN).

For porous substrates such as marble and natural stone, the pores must be sealed with any suitable solution available.

Important: Suitable for quartz aggregates with particle size from 1mm to 6mm.

STORAGE

12 months from production date, stored in original unopened packaging protected from direct sun exposure and frost. Storage temperature 5°C - 35°C.

SAFETY INSTRUCTIONS

Always wear protective gloves and glasses and avoid contact. May cause allergy. If the material comes in touch with your eye add a lot of water without touching. And get in touch with your doctor and seek medical advice.

The content is not flammable but keep away from heat/flames/sparks/hot surfaces because the bucket is plastic.

POISON CENTER 1401

BUCKET B

DESCRIPTION

VERTICAL decorative binder superior UV resistance and durability
For resin quartz , marble , granite , natural stone carpet

APPLICATION PROCEDURE

For use after applying VERTICAL BUCKET A.

The material must not come into contact with water until it is fully dry.
Your tools must always be clean during the application.

Divide the surface into approximately 1 square meter sections. Apply Bucket A material with a brush and immediately use the mixed Vertical Bucket B (Vertical Resin & Quartz). Then continue with the next square meter.

When finished, leave to dry for 24 hours. Then use Gravity Resin Quartz Floor Bucket A+B (mixed) as a top coat with a paint roller (make sure the material is evenly distributed over the roller. Before applying to the surface, roll a few times to remove excess material so that it leaves a thin coat).

After applying the top coat, curing takes another 24 hours.

PRIMING

Priming is required when the application is on non-porous substrates such as ceramic/glazed tiles and also on cement floors. In this case, 2-Component Cement Insulation is applied using a roller (waiting time: 2–3 days before applying VERTICAL RESIN).

For porous substrates such as marble and natural stone, the pores must be sealed with any suitable solution available.

MIXING

Use a 25 kg GRAVITY RESIN QUARTZ bag for every 5 kg of VERTICAL BUCKET B.
(Recommended Ratio 5kg stones:1kg VERTICAL RESIN)

Mix with a mixer until the materials blend seamlessly.

Application time must not exceed 30 minutes after mixing.

Important: Suitable for quartz aggregates with particle size from 1mm to 6mm.

STORAGE

12 months from production date, stored in original unopened packaging protected from direct sun exposure and frost. Storage temperature 5°C - 35°C.


SAFETY INSTRUCTIONS

Always wear protective gloves and glasses and avoid contact. May cause allergy. If the material comes in touch with your eye add a lot of water without touching. And get in touch with your doctor and seek medical advice.

The content is not flammable but keep away from heat/flames/sparks/hot surfaces because the bucket is plastic.

POISON CENTER 1401

Technical Property	Typical Value
Appearance	Transparent to slightly translucent solid film
Odour	Slight, mild almond-like scent
Boiling Point	Approx. 100°C
Water Solubility	Fully miscible with water
pH	7.5-8.5
Storage	Store below 50°C in a cool, dry, ventilated area
Application Temp.	+0°C until +35°C
Temp. Resistance	-40°C until 90°C Humidity ≤85% (RH)
Dry Time	24h

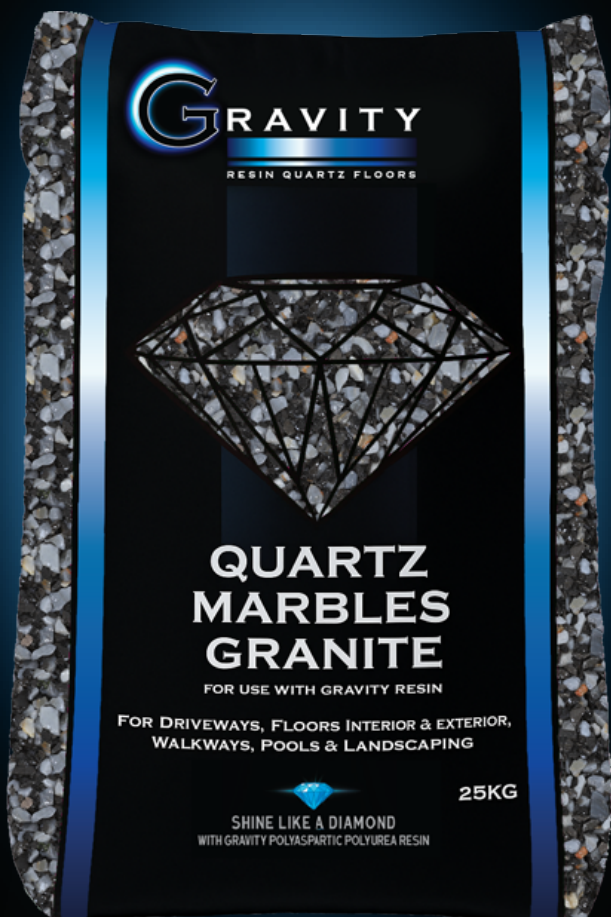



Address: Riga Fereou & Andrea Zakou
Christina Center 1st Floor, Office 101, 3095,
Limassol - Cyprus

    @gravity.resin.quartz

 Gravity.services.cy@gmail.com

  +357 97 881 886

WWW.GRAVITYRESINQUARTZ.COM